查询WP7083YD供应商

Kingbright

T-1 3/4 (5mm) SOLID STATE LAMP

Part Number: WP7083YD YELLOW

Features

- ●OUTSTANDING MATERIAL EFFICIENCY.
- ●RELIABLE AND RUGGED.
- ●I.C. COMPATIBLE.
- ●RoHS COMPLIANT.

Description

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

Package Dimensions

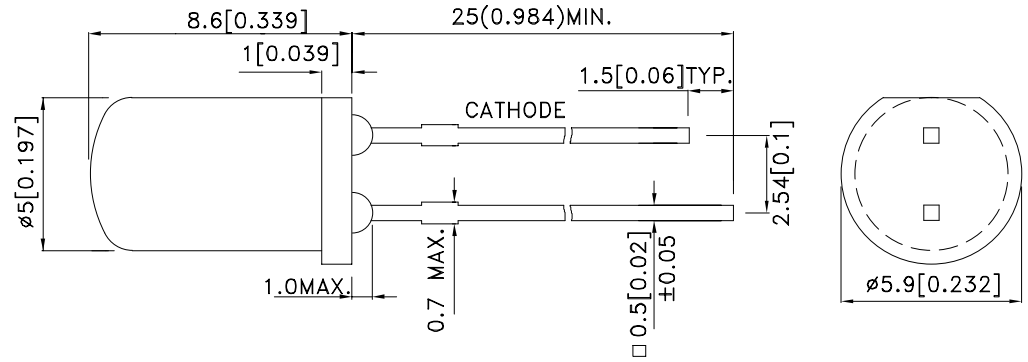

Notes:
1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.25(0.01") unless otherwise noted.
3. Lead spacing is measured where the leads emerge from the package.
4. Specifications are subject to change without notice.

Kingbright

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) @ 10mA		Viewing Angle
			Min.	Typ.	2 θ 1/2
WP7083YD	YELLOW (GaAsP/GaP)	YELLOW DIFFUSED	1.8	8	60°

Notes:
1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
2. Luminous intensity/ luminous Flux: +/-15%.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Yellow	590		nm	I_F=20mA
λD [1]	Dominant Wavelength	Yellow	588		nm	I_F=20mA
Δλ1/2	Spectral Line Half-width	Yellow	35		nm	I_F=20mA
C	Capacitance	Yellow	20		pF	V_F=0V;f=1MHz
V_F [2]	Forward Voltage	Yellow	2.1	2.5	V	I_F=20mA
I_R	Reverse Current	Yellow		10	uA	V_R = 5V

Notes:
1.Wavelength: +/-1nm.
2. Forward Voltage: +/-0.1V.

Absolute Maximum Ratings at TA=25°C

Parameter	Yellow	Units
Power dissipation	75	mW
DC Forward Current	30	mA
Peak Forward Current [1]	140	mA
Reverse Voltage	5	V
Operating/Storage Temperature	-40°C To +85°C	
Lead Solder Temperature [2]	260°C For 3 Seconds	
Lead Solder Temperature [3]	260°C For 5 Seconds	

Notes:
1. 1/10 Duty Cycle, 0.1ms Pulse Width.
2. 2mm below package base.
3. 5mm below package base.

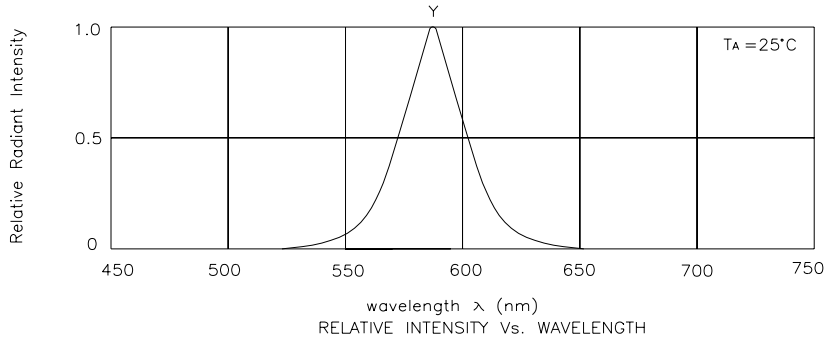

RELATIVE INTENSITY Vs. WAVELENGTH

Yellow **WP7083YD**



FORWARD CURRENT Vs.
FORWARD VOLTAGE



LUMINOUS INTENSITY Vs.
FORWARD CURRENT



FORWARD CURRENT
DERATING CURVE



LUMINOUS INTENSITY Vs.
AMBIENT TEMPERATURE



SPATIAL DISTRIBUTION

Kingbright

PACKING & LABEL SPECIFICATIONS **WP7083YD**